

Model DSP-M

DRIVEABLE STOCK PICKER



ENHANCED ERGONOMICS

- Low platform entry at 20 cm and adjustable control handles will improve your work comfort

MORE SERVICEABILITY

- Increase your uptime with the maintenance free mast and AGM batteries

MORE PRODUCTIVITY

- Lifting height can be programmed by the operator
- We combined Drive and Rise technology with AC drive motor to boost your productivity
- Automatic and smooth speed adjustment based on the platform height
- Maximum driving speed up to 0.5 m of elevation

INNOVATIVE DESIGN

- Innovative forklift style of the driving system and the mast
- Compact dimensions and zero turning radius will allow easily to access confined spaces



Standard Features

- 0.67 m x 0.59 m (W x L) Operator platform with dual side entry
- 0.74 m x 0.50 m (W x L) Adjustable height material tray
- Ergonomic adjustable controls
- Two handles for stability
- Safety interlocked controls
- Selectable performance level
- Programmable lifting height
- Steering wheel homing function
- Simultaneous Drive & Rise technology
- Continuous variable drive speed depending on platform height
- Programmable access control
- Battery discharge indicator (located on platform)
- Hour meter
- Steering wheel position indicator
- Interlocked side doors
- Electronic kickplates
- Platform load sensing system
- Tilt sensor
- Horn
- 2 amber strobe lights (under the platform and on the rear cover)
- Configurable alarm
- Remote manual descent
- Manual brake release
- Lanyard attachment anchor
- Single front wheel drive
- Single front wheel steer
- Non mark tyres and casters
- Low maintenance mast without cables or chains
- Transportation tie-down lugs
- Fork truck pockets
- Rubber bumpers



Standard Specifications

- Battery
- Battery charger
- Drive system
- Maintenance-Free AGM 200A.h - 24V
- Self-adjusting (100-240Vac)
- AC Direct Electric

Accessories & Options

- Cargo retracting strap available for both, manual and powered tray
- Panel carrier (available with powered tray only)
- Platform to chassis obstacle detection sensor
- Charger cable reel
- Biodegradable oil
- Food compatible oil
- Caster wheel guard
- Platform mechanical door lock (elevated)

Model DSP-M

DRIVEABLE STOCK PICKER

Performance


- Working height 6.55 m
- Platform height 4.55 m
- Operator platform capacity 120 kg
- Material tray capacity 100 kg
- Platform size (W x L) - dual side entry 0.67 m x 0.59 m
- Material Tray Size (W x L) 0.74 m x 0.50 m
 - A. Overall Height - Stowed 1.67 m
 - B. Overall Width - Stowed 0.80 m (0.82 at the front bumpers)
 - C. Overall Length 1.54 m
 - D. Ground Entry Height 0.20 m
- Minimum tray stowed height - manual 0.86 m
- Minimum tray stowed height - powered 0.61 m
- Maximum Tray Stowed Height 1.29 m
- Maximum Tray Elevated Height 5.65 m
- Drive speed - lowered 8.00 km/h
- Drive speed - elevated ** Continuous variation from 8km/h to 1,1km/h
- Machine weight * 915 kg
- Maximum ground bearing pressure front casters 24 kg/cm²
- Maximum ground bearing pressure rear wheels 17 kg/cm²
- Turning radius - inside 0
- Break over angle 10%
- Gradeability 10%
- Wheel diameter - drive wheel 0.23 m
- Wheel diameter - rear wheel 0.25 m
- Wheel diameter - front castor 0.125 m



* Certain options or country standards may increase weight and/or dimensions.

** Maximum driving speed allowed up to 0,5m (platform floor height)

Dimensions

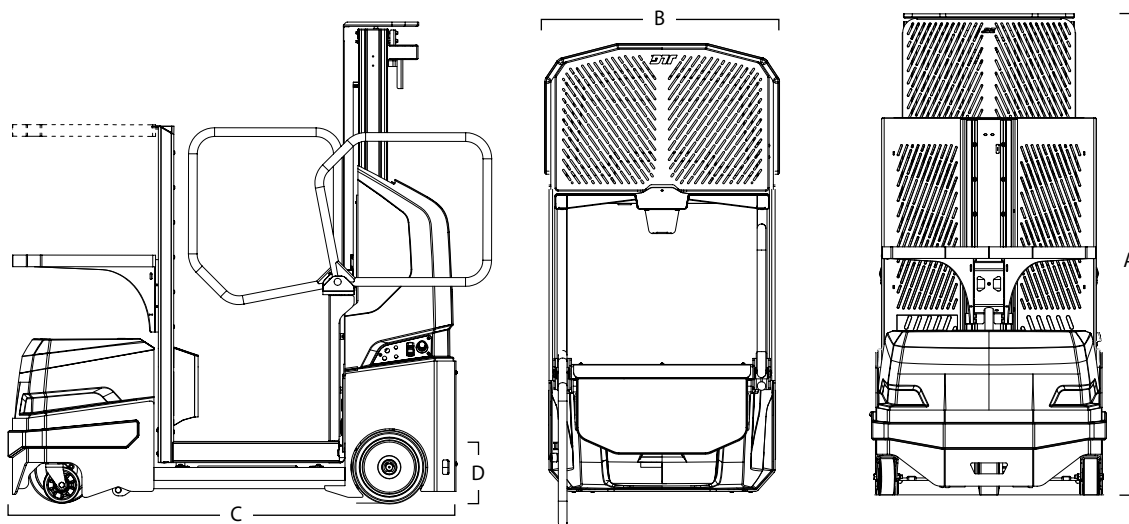

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



Skyreach Access Solutions Ltd

Tel: 0333 335 5140

Email: infor@skyreachaccess.com

www.skyreachaccess.com

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.